

# FAT-C8PA

## 8-Core Fiber Access Terminal Box

### Application

- Specifically designed for Fiber-to-the-X (FTTX) networks, serving as a termination point where the drop cable connects with the feeder cable. It meets the needs of at least 8 users by providing convenient splicing, splitting, storage, and management within a suitable space.
- Rated IP55, Ideal for residential areas, commercial buildings, and small enterprises, it is suitable for both indoor and outdoor environments.



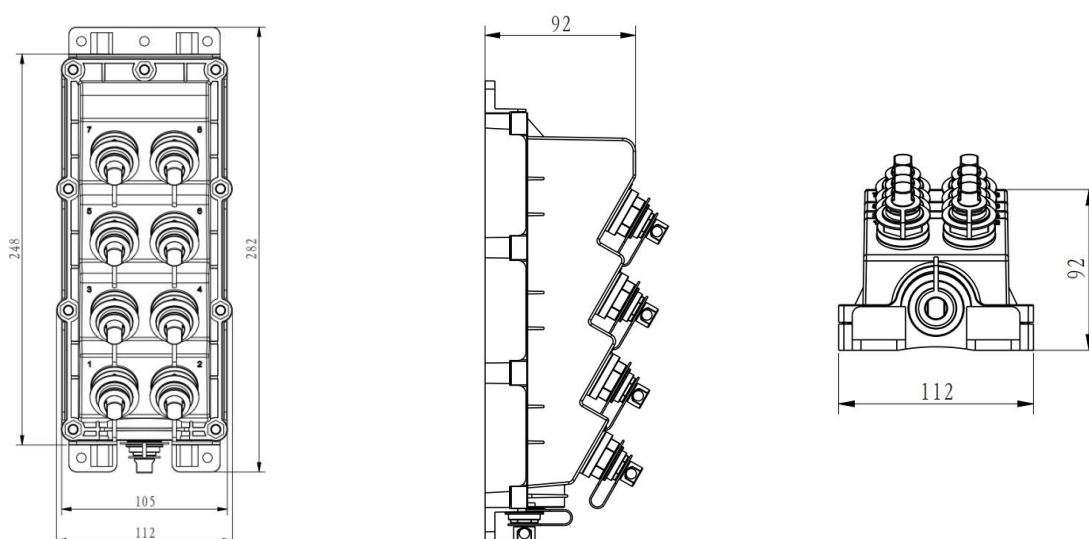
### Specifications

Part No.	FAT-C8PA
Dimensions	282x112x92mm
Material of Housing	PC or PC+ABS
Color	Black
Cable Entry Port	1 x Ø20mm or 1 CORNING Water-proof Adapter
Number of Exit Ports	8 CORNING Water-proof Adapter
Patching Capacity	8 SC Adapters
Splicing Capacity	8 F
Number of Splitter	1x8 micro PLC splitters
IP Rating	IP65
Mount method	Wall or Pole Mounted



## Features & Configurations

- **High-Quality Engineering Plastic:** The body is made of high-quality engineering plastic, ensuring durability and strength.
- **Waterproof Performance:** Sealed with bolts, it achieves an IP55 rating, offering excellent waterproof capabilities suitable for harsh natural environments.
- **Convenient Operation:** Equipped with a Corning waterproof adapter, the device facilitates easier operation, improving installation and maintenance efficiency.
- **Flexible Splitting:** Supports the installation of a 1x1:8 optical splitter, allowing for convenient fiber splitting and management.

## Dimension Drawing (mm)



## Accessories

Picture	Name	Size	Qty
	Wall-mounting Kit	-	4 Pairs
	Splice sleeve	Ø1.2*45mm	8 PCS

## Packing List

Part No.	Carton Size	PCS/CTN	G.W.
FAT-C8PA	60x31*50CM	20	17KGS