
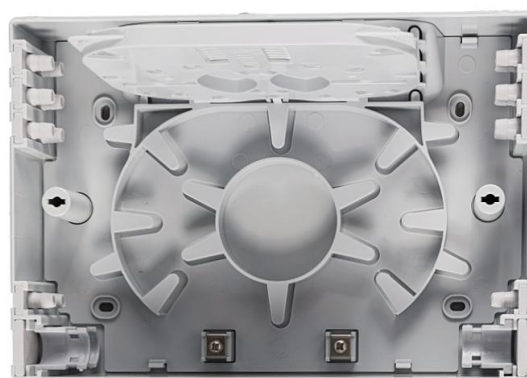


## FB-T418

### Fiber Optic Floor Terminal Box

#### Application

- Designed for providing full splice and perfect fiber management in FTTx projects. Features 8 drop ports on bottom and 8 on top for connecting fibers and pigtails.
- IP43 Rated, suitable for use in buildings or street cabinets..

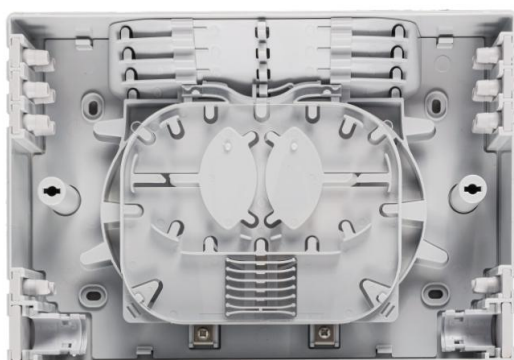


## Features & Benefits

- High-strength construction ensures long service life and reliable performance.
- Slide open-type structure with "click" sound for secure cover locking.
- Divided operating space for loop-through cables and pigtail splicing, easing installation and maintenance.
- Splice trays with flip design, fixable at 45 or 90 degrees for convenient access.
- Supports up to 4 trays with configurable splice capacity of 12/24/48 FO.
- Accommodates 4x 1:8 or 4x 1:4 micro splitters for flexible network configurations.
- Cover lock with 2 plastic locks and 1 plastic key for added security.

## Specifications

Part No.	FB-T418
Dimensions	240 × 165 × 54mm
Cable Entry / Exit Ports	2 / 2 In-line Ports
Cable Ports Diameter	Ø15mm
Drop Cable Ports	6 / 6 In-line Ports × Ø5mm
Splicing Capacity	48 Fibers
Number of Splice Tray	4 Trays
Splices per Tray	12 Fibers / Tray
Suitable Splitter	1×4 or 1×8 Micro PLC Splitter / Tray
IP Rating	IP43
Mounting	Wall Mount

## Accessories

Picture	Name	Size	Quantity
	Wall-mounting Kit	/	4 Pairs
	Nylon Cable Tie (for Main Cable)	2.5×150mm	4 PCS
	Nylon Cable Tie (for Drop Cable)	3×100mm	12 PCS
	Splice Sleeve	1.2/45mm	12 PCS/Tray
	Key	/	1 PC

## Packing List

Part No.	PCS/CTN	G.W.	Carton Size
FB-T418	20	13 KG/CTN	57 × 37 × 37 cm
FB-T418	30	21 KG/CTN	57 × 55 × 37 cm