
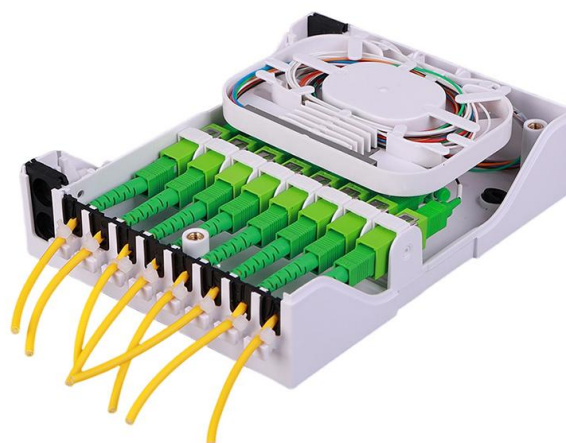


FB-T427

Compact 8-Port Fiber Optic Termination Box

Application

- Designed for the connection of optical fiber to pigtail, providing full splice and perfect fiber management in indoor or cabinet environments.
- IP43 for IP rating; supports wall-mounted installation.

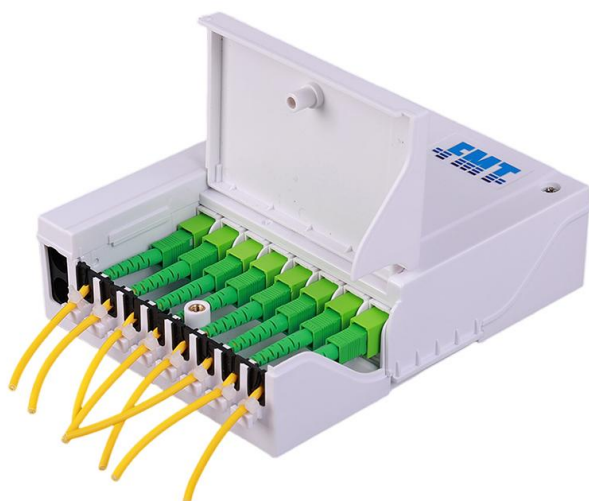






Features & Benefits

- Made of brand new plastic ABS or PC/ABS for enhanced safety and durability.
- Additional Flip-cover design for drop cable access, eliminating the need to open the entire box.
- Clear fiber function area division and clear fiber routing for organized management.
- Special slot for micro PLC splitter 1:8 in the splice tray.
- Supports 8 SC adapters for efficient patching.

Specifications

Part No.	FB-T427
Dimensions	169 × 130 × 44 mm
Housing Material	ABS or PC/ABS
Cable Entry / Exit Ports	2 / 2 In-line Ports × Ø12mm
Drop Cable Ports	8 × Ø5mm Ports
Patching Capacity	8 SC Adapters
Splicing Capacity	8 Fibers
Number of Splice Tray	1 Tray
Splices per Tray	8 Fibers / Tray
Suitable Splitter	1×8 Micro PLC Splitter / Tray
IP Rating	IP43
Mounting	Wall Mount

Accessories

Picture	Name	Size	Quantity
	Wall-mounting Kit	/	4 Pairs
	Nylon Cable Tie (for Main Cable)	2.5 × 150 mm	4 PCS
	Nylon Cable Tie (for Drop Cable)	3 × 100 mm	8 PCS
	Splice Sleeve	Ø1.2 × 45 mm	8 PCS
	Spiral Wrapping Tube	10 - 100mm	1 PC

Packing List

Part No.	PCS/CTN	G.W.	Carton Size
FB-T427	40	13.5 KG/CTN	58 × 41 × 30 cm