

FB-T448-8P

8 Cores Fiber Optic Floor Termination Box

Application

- The Indoor FTTH Termination Box is applicable for FTTH projects and provides mechanical protection for the fiber management system, including splicing and fiber retention functions.
- It is suitable for indoor wall-mounting or cabinet installations to ensure reliable connectivity in residential and commercial environments..



Color Customization

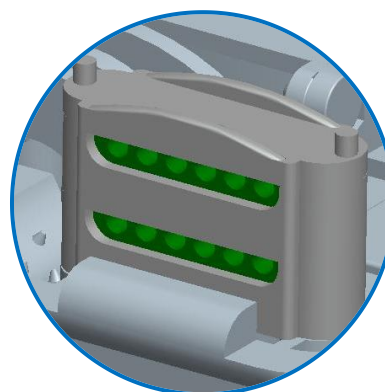
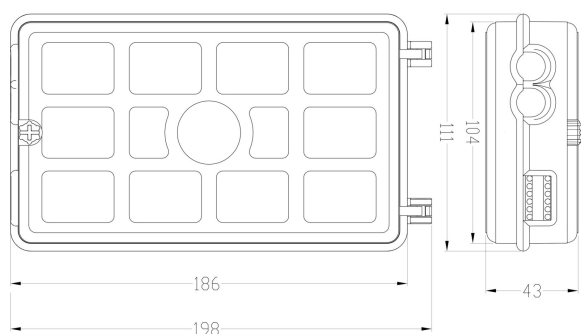


8 SC or LC Duplex Adapters
& 1 Splice Tray for up to 12 Fibers





Specifications

Part No.	FB-T448-8P
Dimensions	198 × 112 × 45 mm
Housing Material	ABS or PC/ABS
Cable Entry / Exit Ports	2 Mid-span Ports × Ø15mm
Drop Cable Ports	12 Ports × Ø3mm
Patching Capacity	8 SC or LC Duplex Adapter
Splicing Capacity	12 Fibers
Number of Splice Tray	1 Tray
Splices per Tray	6 / 12 Fibers
IP Rating	IP43
Mounting	Wall Mount

Dimension Drawing & Drop Cable Ports



Accessories

Picture	Name	Size	Quantity
	Wall-mounting Kit	/	4 Pairs
	Nylon Cable Tie	3 × 100 mm	2 PCS
	Splice Sleeve	Ø1.2 × 45 mm	6 / 12 PCS
	Adhesive Tape	200 × 15 × 1 mm	2 PCS

Packing List

Part No.	PCS / CTN	G.W. / CTN	Carton Size
FB-T448-8P	50	16 KG	61 × 42 × 28 CM