

GP-T1170

Outdoor Hybrid Outlet IP54 Wall-Mounted

Application


- The Outdoor Hybrid Outlet is a robust Terminal designed for protecting fiber optic splices in outdoor.
- It features an IP54 rating and supports mounting over embedded wall boxes or directly on the wall.



Key Features

- The outlet accommodates keystone connectors for RJ45, RJ11, RG6, UTP, and coaxial.
- It admits up to two SC/APC adapters for fiber terminations.
- The minimum curvature radius of 30mm ensures proper fiber handling.
- The IP54 rating provides dust and water protection for outdoor use.

Dimension Drawing

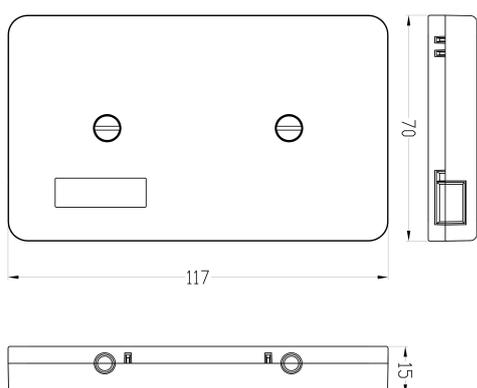

Specifications

Part No.	GP-T1170
Dimensions	117 × 70 × 15 mm
Material	ABS (UL94 V0 Optional)
Color	White (Customizable)
Mounting	Wall Mount
IP Rating	IP54 (or IP20)
Ø3 mm Round Cable Entries	3
3×2 mm Flat Drop Cable Entries	4
Storage of Fibers	G.657 Fiber
Adapter Ports	2
Adapter Type	SC Adapter or RJ Module
Splicing Capacity	1 Fibers
Splicing Method	Fusion Splice
Compatible Fiber	G.657A1/A2/B3
Operating Temperature	-40°C to +70°C

Accessories

Picture	Name	Size	Quantity
	Wall-mounting Kit	/	2 Pairs
	Splice Sleeve	Ø1.2 × 45 mm	1 PCS

Ordering Information

Part No.	Description
GP-T1170	Empty box (no adapters, no pigtails)
GP-T1170-2A	Fully loaded with 2 × SC/APC adapters
GP-T1170-2A-2P	Fully loaded with 2 × SC/APC adapters + 2 × SC/APC pigtails (900 µm, 1 m)

- ◆ Other configurations are available upon request. Customization supported.

Packing List

Part No.	PCS / CTN	G.W. / CTN	Carton Size
GP-T1170	300	24 KG	54 × 40 × 30 CM

- ◆ Default packaging: one unit per Individual inner box.
- ◆ Transparent PE bag (cost-effective, most popular) is also available as customized packaging. Extra charge applies.