


GP-T1500

1-Core FTTH In-line Joint Box

Application

- The GP-T1500 Fiber Optic Joint Box, is adopt compact design for Indoor FTTH network, offers quick and reliable connections, excellent protection, and efficient management for the FTTH network.
- Suitable for indoor wall mount application.

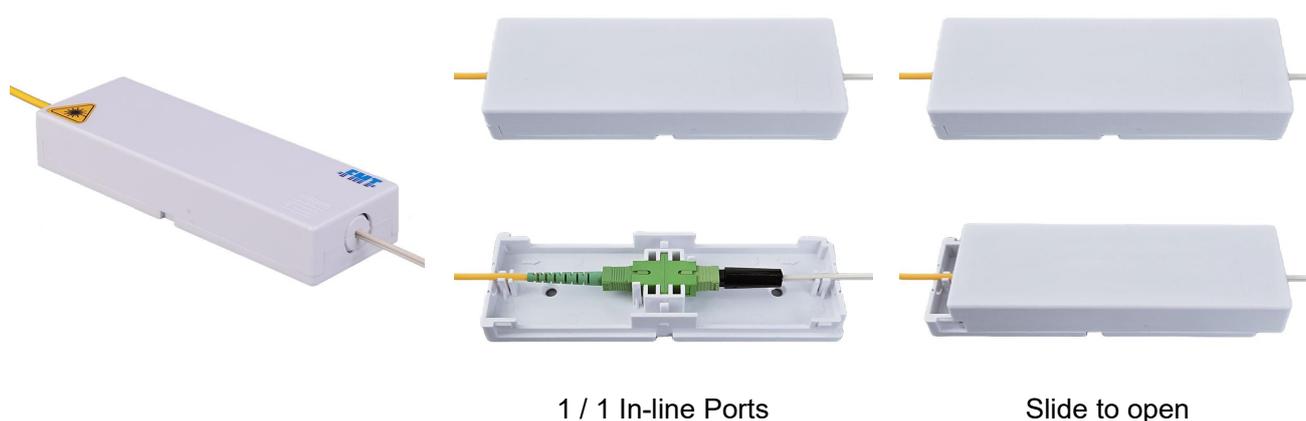

Features & Benefits



Specifications

Part No.	GP-T1500
Dimensions	150 × 50 × 25 mm
Material	ABS (UL94 V0 Optional)
Color	White (Customizable)
Mounting	Wall Mount
IP Rating	IP20
Cable Entries	1 / 1 In-line
Supported Cable	Ø3 mm Round or 3×2 mm Flat Drop Cable
Storage of Fibers	G.657 Fiber
Patching Capacity	1 SC Adapter
Splicing Capacity	Not Supported
Operating Temperature	-40°C to +70°C

Accessories

Picture	Name	Size	Quantity
	Wall-mounting Kit	/	2 Pairs

Ordering Information

Part No.	Description
GP-T1500	Empty box (no adapters, no pigtails)
GP-T1500-1A	Fully loaded with 1 × SC/APC adapters

- ◆ Other configurations are available upon request. Customization supported.

Packing List

Part No.	PCS / CTN	G.W. / CTN	Carton Size
GP-T1500	250	15 KG	46.5 × 31 × 40.5 CM

- ◆ Default packaging: one unit per transparent PE bag (cost-effective, most popular).
- ◆ Individual inner box is available as customized packaging. Extra charge applies.